

FOR IMMEDIATE RELEASE

Contact: Nermine Abdel-Hakim  
Marketing Communications Specialist  
Dymax Corporation  
(860) 482-1010  
[nabdel-hakim@dymax.com](mailto:nabdel-hakim@dymax.com)

## Dymax Introduces a New Bomar<sup>®</sup> Oligomer- BR-970H

*Ideal for 3D Printing Resins*

Torrington, Connecticut – July 26, 2016...Dymax Corporation has recently released Bomar<sup>®</sup> BR-970H, a stain resistant oligomer with high modulus, ideal for 2D and 3D inkjet printing applications, as well as graphic art applications.


As a low viscosity, difunctional, aliphatic urethane acrylate, BR-970H offers rapid cure and non-yellowing properties for higher optical clarity, and color stability for premium performance. Its low shrinkage (0.7%) during cure makes it ideal for 3D-printing applications where good mechanical properties and aesthetics are expected. Moreover, it provides low water absorption of 0.15, making it perfectly suitable for applications where 3D printed parts are exposed to high-humidity environments or washed with water- based solutions. In addition, it does not need blending with other oligomers to achieve a balance of toughness and flexibility. Compatible dispensing and curing equipment, as well as the option to use Dymax scaleup and manufacturing services are also available.

Dymax Corporation develops innovative oligomer, adhesive, coating, dispensing, and light-curing systems for applications in a wide range of markets. The company's products are perfectly matched to work seamlessly with each other, providing design engineers with tools to dramatically improve manufacturing efficiency and reduce costs. Major markets include aerospace, appliance, automotive, cosmetics, electronics, industrial, medical device, metal finishing, and UV-curable inks & coatings.

For additional information, visit [www.dymax-oc.com](http://www.dymax-oc.com) or contact Dymax O&C Application Engineering at [O&Ctechnical@dymax.com](mailto:O&Ctechnical@dymax.com) or 860-626-7006.



© 2014 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A. Technical data provided is of a general nature and is based on laboratory test conditions. Dymax does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax standard Conditions of Sale. Dymax does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this communication shall act as a representation that the product use or application will not infringe on a patent owned by someone other than Dymax or act as a grant of license under any Dymax Corporation Patent. Dymax recommends that each user adequately test its proposed use and application before actual repetitive use, using the data in this communication as a general guideline.

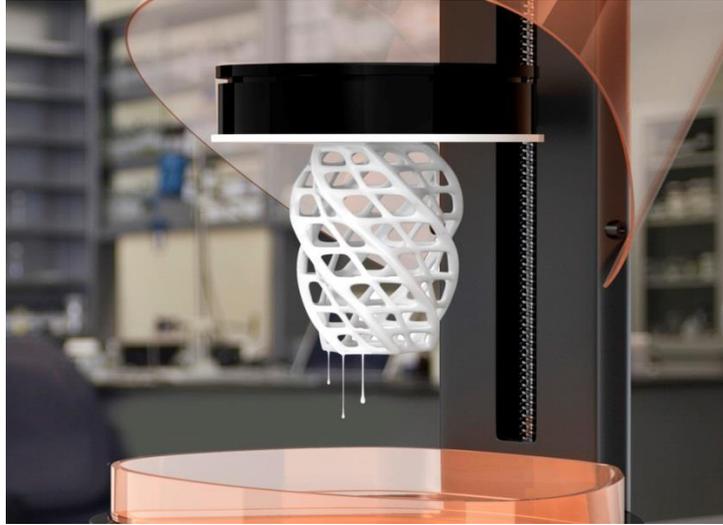

# # #