

Bomar™ BRC-843S Hydrophobic Urethane Acrylate

APPLICATIONS

- **Coatings & Inks for Steel, Plastic, and Glass**

FEATURES

- **Improves Adhesion**
- **Enhances Hardness**
- **Non-Yellowing and High Gloss**
- **Low Water Absorption**

FEATURES

- **High Temperature Resistance**
- **Increases Weatherability**
- **Provides Alkaline Resistance**

Bomar™ BRC-843S is a difunctional, hydrophobic urethane acrylate which can be formulated to be used in heavy-duty industrial and commercial applications. The resulting tough film makes a functional, non-yellowing, protective single-coating that extends the substrates use-life. BRC-843S is a softer and more flexible version of BRC-843. This oligomer is also tougher than BRC-843. The low water absorption and alkaline resistance make this oligomer perfect for specialty applications in the following industries: aerospace, appliance, automotive, electronic, and medical device.

UNCURED PROPERTIES

Property	Value
Viscosity, cP (50°C)	40,000
Pt-Co (APHA) Color or Gardner Color	<100
Refractive Index (25°C)	1.480
Density, g/cm ³ (25°C)	1.1

TYPICAL FORMULATIONS

Test Formulation Name	I30	I50	TP50	TM50	H50	HE30
BRC-843S	70	50	50	50	50	70
IBOA	30	50				
TMPTA				50		
TPGDA			50			
HDDA					50	
HEMA						30
Omnirad™ 481	2	2	2	2	2	2
Viscosity, 25°C *	23,600	3,000	3,200	13,300	1,500	9,900

* Brookfield – CAP 2000+ @ 25°C

CURED MECHANICAL PROPERTIES

Property	I30	I50	TP50	TM50	H50	HE30
Tensile Strength, psi**	2,100	4,700	2,800	4,000	3,300	1,100
Elongation, %**	310	390	32	5.9	15	240
Elastic Modulus, ksi**	0.8	1.5	16	94	39	0.6
Durometer Hardness	36D	60D	61D	80D	66D	75D
Water Absorption, % (24 hrs)	0.4	0.28	0.61	0.56	0.51	3.73
MEK Double Rubs (#)	21	25	69	>200	195	18


T_g (DMA) = -9°C; Peak tan delta; cured with 2 phr of Irgacure® 184

** Per ASTM D882

ADHESION PROPERTIES

Substrate	I30	I50	TP50	TM50	H50	HE30
Aluminum	✓✓	✓✓✓	✓			✓✓
Cold Rolled Steel	✓✓	✓✓✓	✓			✓✓
Glass	✓✓	✓✓✓	✓		✓✓	✓✓
HDPE						
Polycarbonate	✓✓✓	✓✓✓	✓✓✓	✓✓✓	✓✓	
PET	✓✓	✓✓✓			✓✓	✓✓
PMMA	✓✓	✓✓✓			✓✓✓	✓✓
Stainless Steel	✓✓	✓✓✓	✓			✓✓

✓ Recommended ✓✓ Highly Recommended ✓✓✓ Strongly Recommended

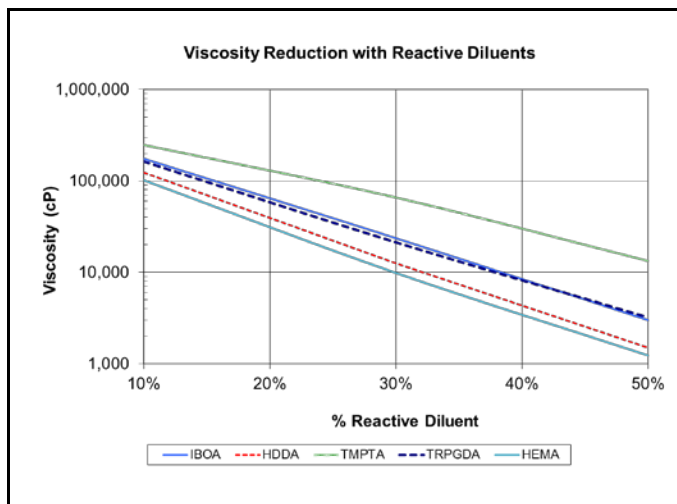

Brookfield – CAP 2000+ @ 25°C

© 2015 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A. Irgacure® is a trademark of BASF Corporation. Technical data provided is of a general nature and is based on laboratory test conditions. Dymax does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax standard Conditions of Sale published on our website at www.dymax.com/pdf/Conditions_of_Sale.pdf. Dymax does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this communication shall act as a representation that the product use or application will not infringe on a patent owned by someone other than Dymax or act as a grant of license under any Dymax Corporation Patent. Dymax recommends that each user adequately test its proposed use and application before actual repetitive use, using the data in this communication as a general guideline. 05/21/2015

Dymax Corporation
860.482.1010 | info@dymax.com | www.dymax.com
Dymax Europe GmbH
+49 (0) 611.962.7900 | info_de@dymax.com | www.dymax.de
Dymax Engineering Adhesives Ireland Ltd.
+353 1.231.4696 | info_ie@dymax.com | www.dymax.ie

Dymax Oligomers & Coatings
860.626.7006 | info_oc@dymax.com | www.dymax-oc.com
Dymax UV Adhesives & Equipment (Shanghai) Co. Ltd.
+86.21.37285759 | dymaxasia@dymax.com | www.dymax.com.cn
Dymax UV Adhesives & Equipment (Shenzhen) Co. Ltd.
+86.755.83485759 | dymaxasia@dymax.com | www.dymax.com.cn

Dymax Asia (H.K.) Limited
+852.2460.7038 | dymaxasia@dymax.com | www.dymax.com.cn
Dymax Asia Pacific Pte. Ltd.
+65.6752.2887 | info_ap@dymax.com | www.dymax-ap.com
Dymax Korea LLC
+82.2.784.3434 | info_kr@dymax.com | www.dymax.com.kr